


# ANATEL TOC600

## *On-Line Total Organic Carbon Analyzer*

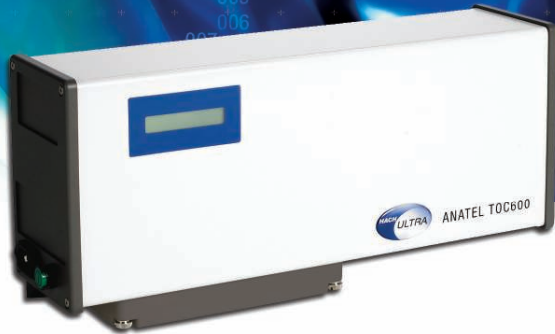

## *Value and performance in TOC analysis*

### Features

- Plug and play - easy installation, start up, and operation
- Online TOC measurement with complete, accurate sample oxidation
- Meets USP <643>, <645>, and EP 2.2.44 requirements for TOC analysis
- Accurate measurement independent of flow rate, pressure or temperature
- Highly reliable, rugged, all-metal design
- No reagents or chemicals required
- No external controller required for analyzer operation

ANATEL TOC analyzers are the industry standard for purified water and ultrapure water. The ANATEL TOC600 provides online TOC analysis for a range of applications requiring USP Chapter <643> and EP Chapter 2.2.44 for TOC requirements and USP Chapter <645> for conductivity measurement. The ANATEL TOC600 combines a rugged all metal design with patented stop-flow oxidation technology. This approach offers complete oxidation of an aliquot of water, fully complying with USP Chapter <643> and EP 2.2.44. The wide dynamic range of the ANATEL TOC600 allows for monitoring of TOC levels across a range of water system applications.

A separate, portable proving system, the CSV module, provides an easy to use system for performing validation, calibration, and system suitability testing. The ANATEL TOC600 can be calibrated using multiple points, offering an accurate calibration curve. The self-contained CSV module can be used across multiple analyzers and requires less standards for a significant reduction in the overall cost of ownership.

Each ANATEL TOC600 can be operated using remote control inputs. Up to eight ANATEL TOC600 analyzers can be networked to one C80 controller providing a low cost multiple analyzer system. Operation of the CSV Module is directed through the C80 controller. The TOC600 automatically calculates results that are formatted into reports for display, print, and archive.

With a robust design, high-reliability, unmatched performance, USP and EP compliance, and a low cost of ownership, the ANATEL TOC600 represents a new class in value for TOC analyzers.



**LANGE** 

UNITED FOR WATER QUALITY

[www.hach-lange.com](http://www.hach-lange.com)

## Performance specifications

<b>Measurement Range</b>	1 to 1,000 ppb as Carbon
<b>Repeatability</b>	±1% or 1 ppb, whichever is greater
<b>Display Resolution</b>	1 ppb
<b>Conductivity Accuracy</b>	2% over full range (uncompensated)
<b>Conductivity Range</b>	0.05 to 150 µS/cm (@ 25 °C)
<b>Conductivity Display Resolution</b>	0.01 µS/cm over full range
<b>Resistivity Range</b>	0.01 to 18 MW-cm (@ 25 °C)
<b>Resistivity Display Resolution</b>	0.1 (up to 14.9 MW-cm), 1.0 (from 15-18 MW-cm)
<b>Maximum Input Conductivity</b>	0.2 µS/cm for all waters, 1.0 µS/cm for all neutral waters 5 µS/cm for water with CO <sub>2</sub> as the sole conductive species
<b>Conductivity Modes</b>	Temperature compensated to 25 °C or uncompensated
<b>Temperature Accuracy</b>	±0.5 °C
<b>Minimum Water Quality</b>	0.2 to 18.2 MW-cm (0.05 to 5 µS/cm)
<b>Water Temperature</b>	5 to 90 °C (41 to 194 °F)
<b>Flow Rate</b>	60 mL/min to 300 mL/min
<b>Pressure</b>	10 to 100 psi (60 to 690 kPa)
<b>Installation Category</b>	11, IEC 1010
<b>Power</b>	100 to 240 VAC, ±10%, 50/60 Hz
<b>Dimensions</b>	193 H x 419 W x 119 mm D (7.6 x 16.5 x 4.7 inches)
<b>Pollution Degree</b>	2, IEC 664
<b>Ambient Temperature</b>	15 to 35 °C (59 to 95 °F)
<b>Humidity</b>	95% relative humidity, non-condensing
<b>Maximum Altitude</b>	4,000 meters (13,125 ft)
<b>Weight</b>	4.85 kg (10.7 lbs)
<b>Analog</b>	4-20 mA, opto-isolated 12 VDC, non-isolated @ ½ amp max.
<b>Digital</b>	Two, opto-isolated inputs; Two, opto-isolated outputs
<b>Serial</b>	RS-232 data acquisition, RS-232 printer port, RS-232 diagnostics
<b>A-net</b>	Protocol RS-485 Maximum Sensors 8 Maximum Controllers 8 Maximum Network Length 1 km (3,000 ft)
<b>Cabling</b>	Shielded twin-axial, Twist-Lock® BNC
<b>Ordering Information</b>	TOC600 Online TOC Analyzer C80 controller 120 VAC 230 VAC CSV module

### Global Headquarters

6, route de Compois - CP 212  
1222 Vérenaz - Geneva - Switzerland  
Tel ++ 41 (0)22 594 64 00  
Fax ++ 41 (0)22 594 64 99

### Americas Headquarters

481 California Avenue  
Grants Pass - Oregon 97526 - USA  
Tel 1 800 866 7889 / 1 541 472 6500  
Fax 1 541 472 6170



UNITED FOR WATER QUALITY