

Thermo Scientific Finnpipette® F3



Spot the Accuracy and Precision

Thermo Scientific Finnpipette F3

Our customers expressed a need for an innovative pipette corresponding to their high standards of accuracy and precision. As a result, we developed the new Finnpipette F3.

Advanced Volume Gearing (AVG)

We equipped Finnpipette F3 with a self-supportive modular volume adjustment mechanism enhancing both accuracy and precision of the instrument. The advanced precision click volume adjustment enables up to 50 clicks per revolution.

Additionally, we separated the mechanism from the pipette hull, which considerably increases its durability. To eliminate possible effects of hand warmth, we isolated the adjustment mechanism thermally from the pipette hull.

Large and Clear Ergovisio

In order to provide the users with an easy volume recognition, we chose to improve the vision comfort by providing Finnpipette F3 with a sizeable black and white display with large digits.

We added a fine adjustment ruler to enhance the superior precision and accuracy of the pipette.

Comfortable Pipetting

We are familiar with the conditions in which the users employ pipettes. Consequently, we focused on ergonomics and designed the Finnpipette F3 handle using extensive

testing and research to increase user comfort and to prevent the occurrence of RSI symptoms. We included an improved supportive finger rest allowing the user to relax the hand between pipetting periods.

Double-Action Pipetting Button


We introduced a revolutionary double-action pipetting hat with a rotating upper part enabling a smooth and steady pipetting action, simultaneously preventing any accidental volume alterations. In addition, the lower volume adjustment wheel remains light to control and offers an excellent grip.

In Finnpipette F3 we combined form and function to meet the needs of our customers willing to bring accuracy to another level.

Easy In-lab Service and Calibration

The Finnpipette F3 is very easy to service; simply open the pipette by removing the tip ejector by hand, and then use the handy maintenance tool to remove the tip cone. The same practical tool is used to adjust the pipette's calibration using the calibration nut located at the top of the pipette handle.

Excellence in Form and Function

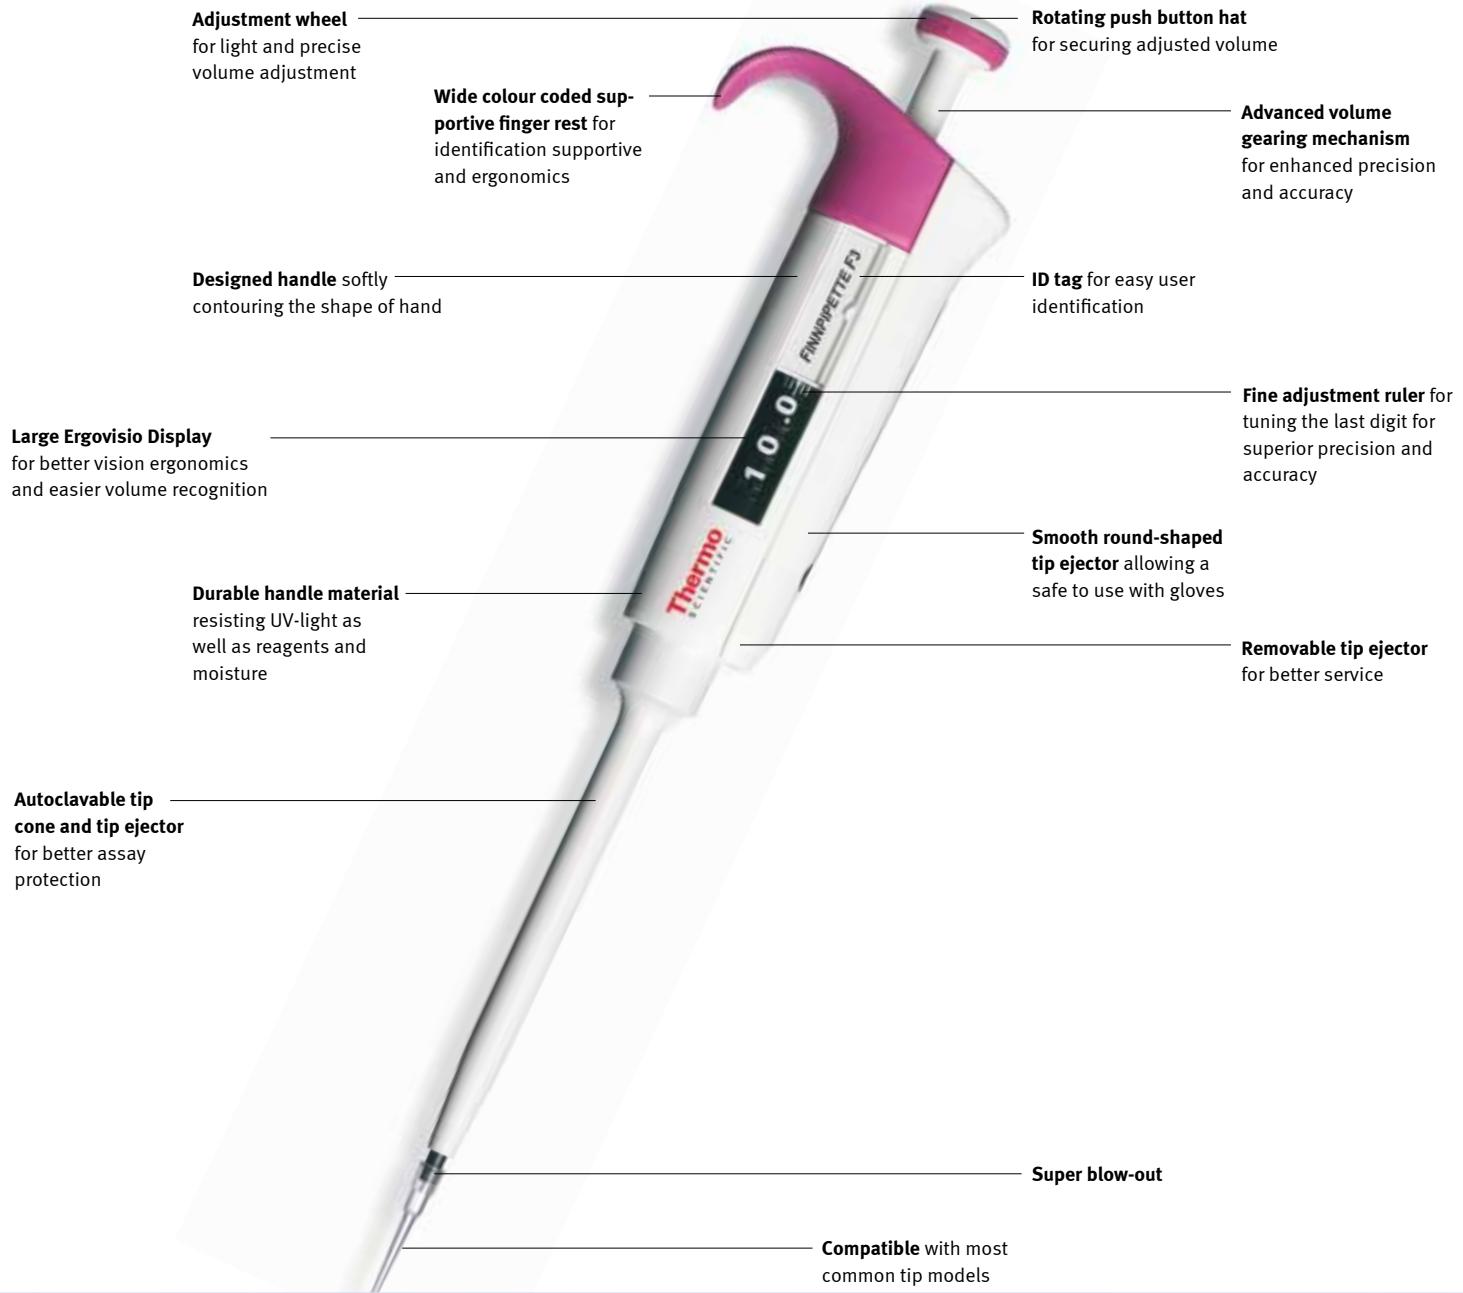

Variable volumes **

Cat. No	Description	Volume	Inacc μ l	Inacc %	Imprec s.d.* μ l	CV %	Color Code	Finntip
4640000	Finnpipette F3 1-10 μ l Micro	10	$\pm 0,10$	$\pm 1,0$	0,05	0,5	Pink	10, Flex 10
		5	$\pm 0,10$	$\pm 2,0$	0,05	1,0		
		1	$\pm 0,025$	$\pm 2,5$	0,02	2,0		
4640010	Finnpipette F3 1-10 μ l Universal	10	$\pm 0,10$	$\pm 1,0$	0,08	0,8	Yellow	250 Universal, 200 Ext, Flex 300
		5	$\pm 0,10$	$\pm 2,0$	0,065	1,3		
		1	$\pm 0,035$	$\pm 3,5$	0,03	3,0		
4640020	Finnpipette F3 2-20 μ l Micro	20	$\pm 0,20$	$\pm 1,0$	0,08	0,4	Turquoise	50
		10	$\pm 0,15$	$\pm 1,5$	0,07	0,7		
		2	$\pm 0,06$	$\pm 3,0$	0,05	2,5		
4640030	Finnpipette F3 2-20 μ l Universal	20	$\pm 0,20$	$\pm 1,0$	0,08	0,4	Yellow	250 Universal, 200 Ext, Flex 300
		10	$\pm 0,15$	$\pm 1,5$	0,07	0,7		
		2	$\pm 0,06$	$\pm 3,0$	0,05	2,5		
4640040	Finnpipette F3 10-100 μ l	100	$\pm 0,80$	$\pm 0,8$	0,20	0,2	Yellow	250 Universal, 200 Ext, Flex 300
		50	$\pm 0,60$	$\pm 1,2$	0,20	0,4		
		10	$\pm 0,30$	$\pm 3,0$	0,10	1,0		
4640050	Finnpipette F3 20-200 μ l	200	$\pm 1,20$	$\pm 0,6$	0,60	0,3	Yellow	250 Universal, 200 Ext, Flex 300
		100	$\pm 1,00$	$\pm 1,0$	0,50	0,5		
		20	$\pm 0,60$	$\pm 3,0$	0,30	1,5		
4640060	Finnpipette F3 100-1000 μ l	1000	$\pm 5,00$	$\pm 0,5$	2,00	0,2	Blue	1000, Flex 1000
		500	$\pm 5,00$	$\pm 1,0$	2,00	0,4		
		100	$\pm 1,50$	$\pm 1,5$	0,60	0,6		
4640070	Finnpipette F3 1-10ml	10000	$\pm 50,00$	$\pm 0,5$	20,00	0,2	Red	10ml , Flex 10ml Ext
		5000	$\pm 40,00$	$\pm 0,8$	15,00	0,3		
		1000	$\pm 20,00$	$\pm 2,0$	8,00	0,8		

*s.d. = Standard Deviation, CV = Coefficient of Variation **Factory calibration limits

Fixed volumes **

Cat. No	Description	Volume	Inacc μ l	Inacc %	Imprec s.d.* μ l	CV %	Finntip
4650000	Finnpipette F3 Fixed Volume 1 μ l Micro	1	$\pm 0,04$	$\pm 4,0$	0,04	4,0	10, Flex 10
4650010	Finnpipette F3 Fixed Volume 5 μ l Micro	5	$\pm 0,07$	$\pm 1,4$	0,07	1,4	10, Flex 10
4650020	Finnpipette F3 Fixed Volume 10 μ l	10	$\pm 0,09$	$\pm 0,9$	0,08	0,8	250 Univ, 200 Ext, Flex 300
4650030	Finnpipette F3 Fixed Volume 25 μ l	25	$\pm 0,15$	$\pm 0,6$	0,13	0,5	250 Univ, 200 Ext, Flex 300
4650040	Finnpipette F3 Fixed Volume 50 μ l	50	$\pm 0,30$	$\pm 0,6$	0,20	0,4	250 Univ, 200 Ext, Flex 300
4650050	Finnpipette F3 Fixed Volume 100 μ l	100	$\pm 0,40$	$\pm 0,4$	0,30	0,3	250 Univ, 200 Ext, Flex 300
4650060	Finnpipette F3 Fixed Volume 250 μ l	250	$\pm 1,00$	$\pm 0,4$	0,80	0,3	1000, Flex 1000
4650070	Finnpipette F3 Fixed Volume 500 μ l	500	$\pm 1,50$	$\pm 0,3$	1,50	0,3	1000, Flex 1000
4650080	Finnpipette F3 Fixed Volume 1000 μ l	1000	$\pm 3,00$	$\pm 0,3$	3,00	0,3	1000, Flex 1000

*s.d. = Standard Deviation, CV = Coefficient of Variation **Factory calibration limits

Pipette Stand

Cat. No	Description	Quantity
9420400	Finnpipette F-stand (6 position stand)	1



© Thermo Fisher Scientific Inc. All Rights Reserved. All trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local representative for details.

www.thermo.com/finnpipette

North America: +1 866 984 3766

Europe: Austria +43 1 801 40 0, Belgium +32 2 482 30 30, Finland/Nordic +358 9 329 100, France +33 2 28 03 20 00, Germany: national toll free 08001-536 376, international +49 6184 90 6940, Italy +39 02 95059 1, Netherlands +31 76 571 4440, Russia/CIS +7 (812) 703 42 15, Spain/Portugal +34 93 223 3154, Switzerland +41 44 454 12 12, UK/Ireland +44 870 609 9203

Asia: India +91 22 5542 9494, Japan +81 45 453 9220, China +86 21 6865 4588 or +86 10 5850 3588,

Other Asian countries +852 2885 4613

Countries not listed: +49 6184 90 6940 or +33 2 28 03 20 00